Sonnenschein Lithium GmbH
Industriestr. 22
D-63654 Büdingen
Tel.: +49(0)6042/954-130
Fax: +49(0)6042/954-190

Sonnenschein Lithium

Keyword:
Enhanced Start

Type: SL-790

Performance Data **Size DD**
(Typical values for batteries stored at 25 °C for one year)

System	$Li/SOCl_2$
Nominal voltage	3.6 V
Nominal capacity	35 Ah
Nominal current	10 mA
Max. continuous discharge current	300 mA
Pulse current capability	900 mA
Anode surface area	90 cm^2
Weight	195 g
Volume	100 cm^3
Temperature range	–55...+85 °C

WARNING:
Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.

See page 4 for further safety recommendations.

Typical Discharge Curves at +25°C

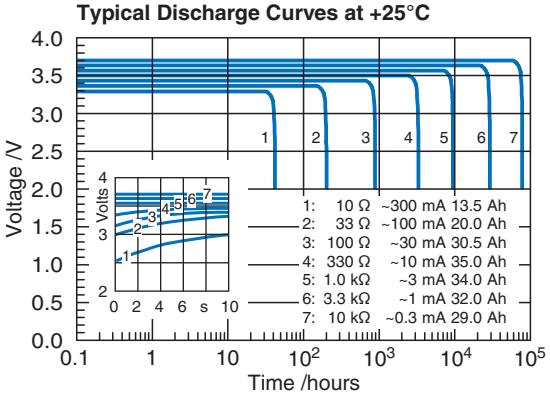

Available Capacity

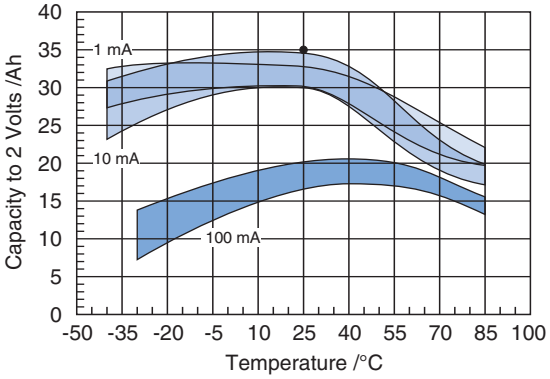

SL-790/S **SL-790/T**

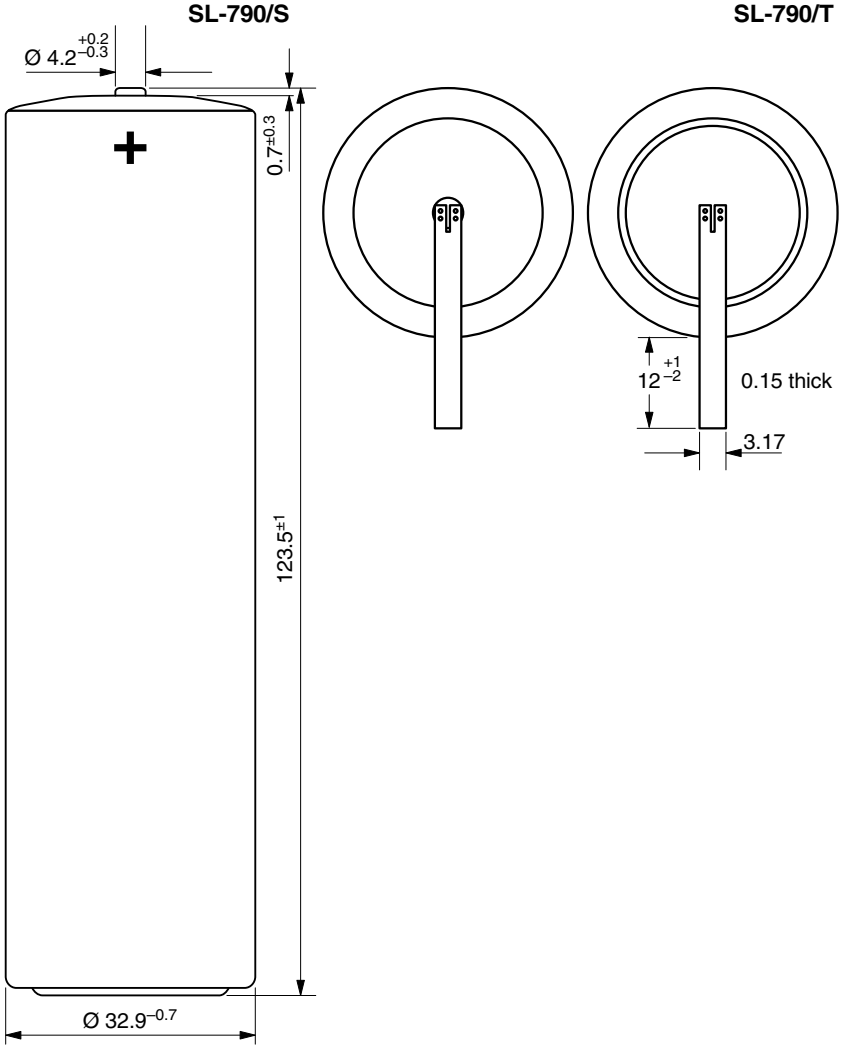

Operating Voltage

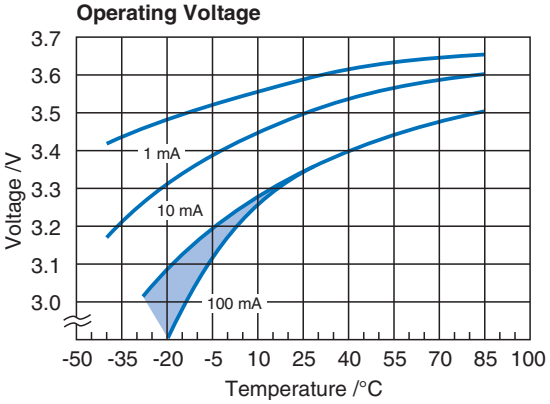

Pulse Discharge Characteristics at +25°C

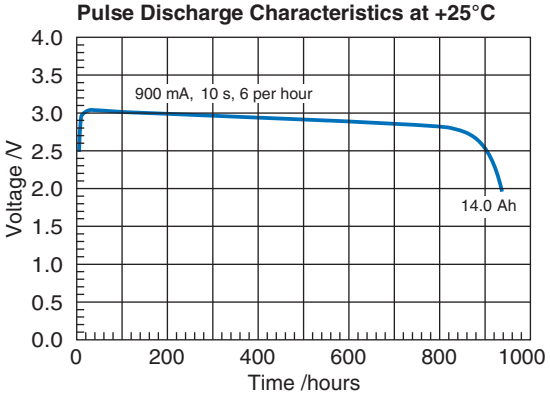

Available Terminations **Catalogue No.**

SL-790/S	Standard	11 1 17901 00
SL-790/T	Tags	11 1 17902 00

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.